# IPC 2U-2308L

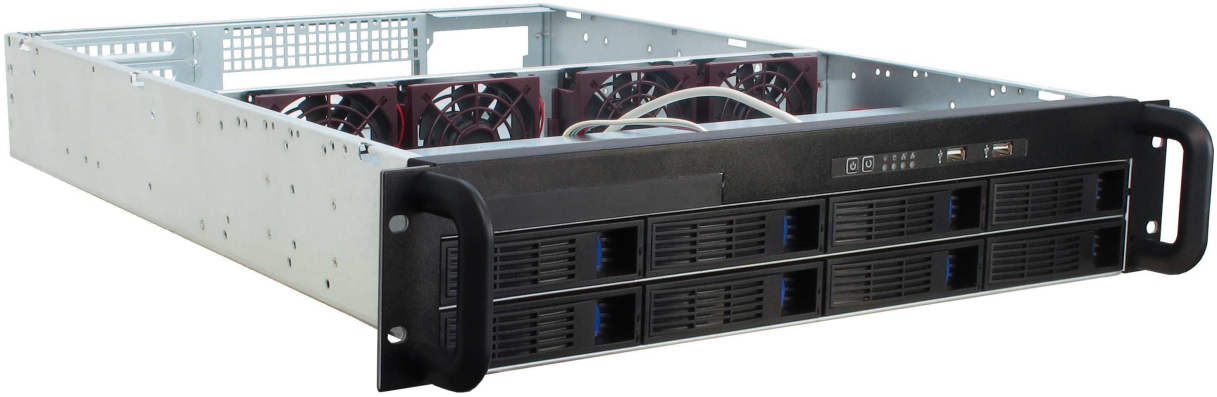

**IPC 2U-2308L**

The **IPC 2U-2308L** is the ideal case for a small and cheap server solution. With its excellent quality and finish, Inter-Tech established the basis for a very variable case.

The **IPC 2U-2308L** offers the possibility to install 8x 2.5" or 3.5" Hot-Swap HDDs, 1x Slim DVD external and 2x internal 2.5" HDDs. The **IPC 2U-2308L** has 4x 80mm fans, that are mounted directly at the back of the drive brackets and ensure therefore a reliable and optimal cooling. Furthermore, the **IPC 2U-2308L** offers the possibility to replace the back of the case with a Low-Profile back*, to facilitate the use of low-profile cards.

***Low-Profile back optional (Art. 88887053)**

Irrtümer vorbehalten. Für die Richtigkeit der Information wird keine Haftung übernommen Stand: 06.12.2012

Inter-Tech Elektronik Handels GmbH

# IPC 2U-2308L

## Specifications

| | |
|---|---|
| Motherboard | ATX, eATX, µATX, SSI EEB |
| Drive Bays | 2.5" or 3.5" external Hot Swap: 8<br>5.25" external: 0<br>Slim DVD external: 1<br>2.5" internal: 2<br>3.5" internal: 0 |
| Front connectors | USB 2.0: 2 |
| Cooling System | Internal: 4x 80mm (included)<br>Rear: 3x 40mm (optional) |
| Controls | Power-Button<br>Rest-Button<br>Alert-Button |
| LED | Power<br>HDD Activity<br>2x Network Activity |
| Power Supply | 2U Server Power Supply |
| Material | 1.0-1.2mm Steel |
| Packing Units | Shipping Units: 1 piece<br>Pallet: 23 pieces |
| Guarantee and Warranty | Case 24 Months Warranty |
| Article Number | 88887041 |
| EAN-Code | 4260133124608 |
| Scope of Delivery | Screw Set |
| Features | 4x 80mm fan included<br>Drive brackets removable<br>3 Reusable slot brackets (Riser Card)<br>USB 2.0 as block connector<br>S-ATA/SAS Hot-Swap backplane with SFF-8087 socket[1] |

[1] The backplane is only compatible with a SAS-Controller with SFF-8087 connector.
To use the backplane with a SATA-Controller, please order the optional BP-002 backplane.

## Dimensions and Weight

| | Cage | Case | Package |
|---|---|---|---|
| Height | 89mm | 89mm | 170mm |
| Width | 430mm | 482mm | 560mm |
| Depth | 650mm | 680mm | 835mm |

Weight (net): 10.14 kg
Weight (gross): 12.32 kg

## Power Supply

| Connector | Quantity | Max. Length |
|---|---|---|
| Mainboard 20+4Pin | - | - |
| P4 12V 4Pin | - | - |
| P4/EPS 4+4Pin | - | - |
| P8 12V 8Pin | - | - |
| PCI-Express 6+2Pin | - | - |
| PCI-Express 6Pin | - | - |
| IDE 4Pin | - | - |
| S-ATA | - | - |
| Floppy | - | - |
| RPM sensor cable | - | - |
| Fan Control | - | - |
| Fan 120mm | - | - |

**Certification**:

Irrtümer vorbehalten. Für die Richtigkeit der Information wird keine Haftung übernommen Stand: 06.12.2012